DAKTRONICS

888-325-8726

transportation@daktronics.com
Support 800-325-8766
Request Information
Inquiries Outside the
USA

Applications

Arrival & Departure Board
Flight Check-In
Advertising & Visual Messaging

6 mm INDOOR MESSAGE DISPLAY

6 mm Indoor Full-Color Message Display

With cutting-edge features such as extra-high resolution and the ability to organize information into windows from multiple types of content sources, our indoor full-color message display is one of the most versatile displays in the industry.

A variety of controller options allows affordable performance for any indoor application. Depending on your facility's needs, this product can integrate with flight information display systems (FIDS), run content from a PC or stream video from VGA or DVI. Make customers feel welcome by showing time-sensitive slideshows, displaying logos and way finding information and presenting travel data in multiple languages.

Features

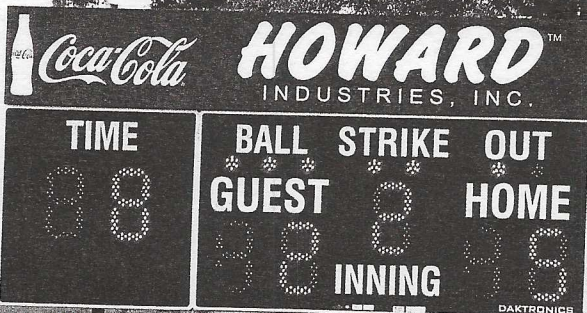|	
Scaleble Design:	This product is available in many configurations, from about 2 by 6 feet to about 10 by 10 feet. Contact Daktronics for more information on size options.
Display Capabilities:	With multiple controller options, the indoor full-color message display can show many types of content — FIDS integration, text, full-color graphics and VGA/ DVI broadcasts.
Content Windowing:	Digital content can be "windowed" with multiple panes of content—text, full-color graphics, or video.
Perfect for Placement in High Ambient Light Areas:	With 64 power-saving dimming levels and a maximum brightness of 1,700 cd/m2, this display is highly visible in areas lit in any manner.
Viewing Angle:	A wide 140x140-degree viewing angle provides many application options in many locations.

Specifications

Pixel Spacing:	6 mm (0.24")
Viewing Angle:	140° horizontal x 140° vertical
Controller Options:	M3, M4, V-Link® 1500 video interface, Venus® 7000 controller
Video Options:	VGA, SVGA, XVGA, DVI (With video-capable controller)
Color Capability:	Up to 4.4 trillion colors
Brightness:	1,700 nits (cd/m²)
Display Cabinet:	Display cabinet sizes vary. Contact Daktronics for more information.
Power:	120/240 VAC
Operating temperature:	0°C to 50°C (32°F to 122°F)
Lighting Element Lifetime:	100,000 hours

Control

Software:	Contact Daktronics for more information. Tel: 888-325-8726
Hardware:	M3, M4, V-Link® 1500 video interface, or Venus® 7000 controller, Ethernet port, RS422 port

DAKTRONICS

BASEBALL

DISTAVIEW™ SCOREBOARDS

VIEWING DISTANCE

DistaView digit technology offers red LED digits designed for higher visibility at long distances at a modest price. The five models on this page show each of the five cabinet paint colors available on DistaView scoreboards.

SHOW TIME

The **BA-2718-31** offers the TIME feature. AT BAT or PITCH COUNT are also available in place of TIME. This model displays basic game information for up to 9 innings.

INDICATE HIT AND ERROR

The **MS-3918-31** offers the time feature and hit/error indicators.

LOGO/SPONSOR PANEL

The **BA-2618-31** offers an optional logo/sponsor panel. Indicators show if a play was scored as a HIT or ERR.

MORE VISIBLE TIME DISPLAY

The **BA-2715-31** offers a choice of TIME, AT BAT or PITCH COUNT. This model displays up to 9 innings of game information.

SELECT A SMALL DISTAVIEW

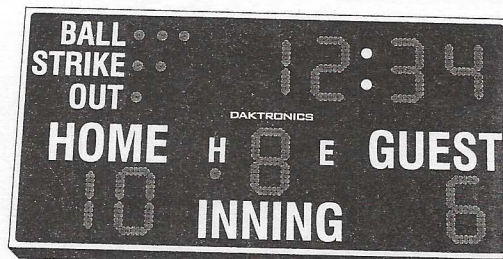The **BA-2515-31** offers 15" digits and is great for smaller venues.

BA-2718-31

H = 5' - 0" (1524 mm)
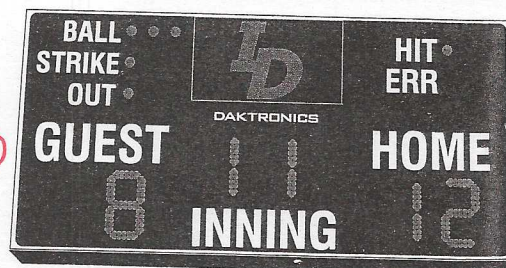W = 10' - 0" (3048 mm)
D = 0' - 6" (152 mm)
Digit size = 18"

MS-3918-31

H = 5' - 0" (1524 mm)
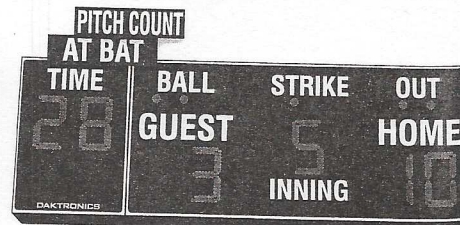W = 10' - 0" (3048 mm)
D = 0' - 6" (152 mm)
Digit size = 18"

BA-2618-31

H = 5' - 0" (1524 mm)
W = 10' - 0" (3048 mm)
D = 0' - 6" (152 mm)
Digit size = 18"

BA-2715-31

H = 3' - 0" (914 mm)
W = 9' - 0" (2743 mm)
D = 0' - 6" (152 mm)
Digit size = 15"

BA-2515-31

H = 3' - 0" (914 mm)
W = 6' - 0" (1829 mm)
D = 0' - 6" (152 mm)
Digit size = 15"